




# Alfa AE200

## Receipt Printer



- ★ Three in one interface, 200~250mm/s print speed
- ★ Allow print density and speed to be fine-tuned
- ★ Multifunctional button and status indicator available
- ★ New utility to view print length, number of cuts and more
- ★ Allow users to upgrade printer firmware

### ★ Interface Description

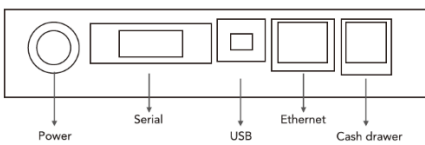

1. USB
2. Serial port
3. Ethernet
4. Cash drawer
5. power



# SPECIFICATIONS AT A GLANCE

---

## Print method

Direct thermal printing

## Emulation

Compatible to ESC/POS

## Paper width

79.5±0.5mm

## Print width

72mm

## Dot density

576 dots/line; 512 dots/line

## Paper roll

80mm width, 83mm diameter max

## Print speed

200 to 250mm/sec max

## Paper thickness

0.06~0.08mm

## Interface

Serial+ USB+ Ethernet

## Character Size

ANK Font

Font A: 12×24dots Font B: 9×17dots Simplified/Traditional

Chinese: 24x24dots

## Data buffer

128K bytes

## Barcode type

UPC-A/UPCE

/JAN13(EAN13)/JAN8(EAN8)CODE39/ITF/CODABAR/

CODE93/CODE128/QRCODE

## Power

Power supply output: DC24V/2.5A

Power supply input: AC 110V/220V, 50-60HZ

Cash drawer: DC24V/1A

## Work environment

Humidity:10 ~ 80% , Temperature: 0 ~ 45 C

## Storage environment

Humidity:10 ~ 90% , Temperature:-10 ~ 60 C

## Print head life

150KM

## Auto cutter life

1.5 million Cuts

## Operating system

Windows X86 / X64 / Linux / OPOS driver;

## Net Weight

1.05 kg

## Dimension

(W×H×D)130×130×185



[www.alfa-egy.com](http://www.alfa-egy.com)

